HD Convertible Camera



AW-HE870

New 2/3" 3-CCD HD/SD Camera joins Panasonic's versatile remote camera line-up




Features

- High quality 2/3 inch CCD
- 14-bit A/D converter and new DSP provide clear, sharp images
- Panasonic's technology improves resolution and picture quality
- Built-in Down Converter and HD/SD switchable
- Provides HD component and SD composite output simultaneously
- HD/SD-SDI output option (AW-HHD870)
- Same operation and interface as current SD convertible camera series*. And can be interfaced with current Pan/Tilts** and controllers***.
- Video format: 1080/50i, 720/50p, 576/50i




An example of a pan tilt head and lens combination (Recommended lens: AW-LZ17MD9A)

■ Rear view



Dimensions

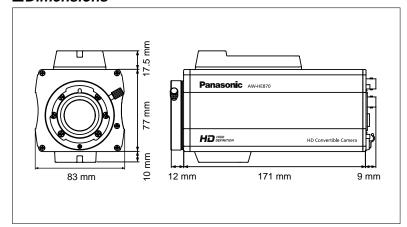



Option

SDI Card AW-HHD870

SDI card can be plugged in AW-HE870 camera and output a HD/SD-SDI signal. It has two distributed SDI outputs and a Zoom/Focus control port that can be connected with a lens cable.

■ Specifications

Image elements	2/3" 3CCD	Video output	Composite (BNC x 1, D-sub50pin x 1) Y/C (D-sub50pin x 1) Y/B (D-sub50pin x 1) Y/Pr/Pb (D-sub50pin x 1) Y/Pr/Pb (D-sub50pin x 1) Y/Pr/Pb (D-sub50pin x 1)	
Lens mount	2/3" bayonet mount			
Video format	1080/50i, 720/50p, 576/50i			
White balance	AWB A/B (R/B painting), ATW 3,200K/5,600K preset	I/O connecter	Composite OUT: BNC, Genlock IN: BNC (black burst), IRIS: HIROSE 12pin, DC 12 V: DC Jack, I/F REMOTE: D-sub50pin	
Black balance	Auto (R/B painting)	I/O connecter		
Color bar	SD: EBU BAR HD: EBU BAR	Power supply	DC 12 V	
		Power consumption	18 W	
Shutter speed	1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000, ELC Synchro-scan (61.19 Hz to 1466 Hz)	Storage temperature	-20 °C to 60 °C	
		Operating temperature	0 °C to 40 °C	
Gain	0 to 18 dB (step) AGC	Weight	1.2 kg	
Iris	Auto, Manual	Dimensions (W x H x D)	83 mm x 104.5 mm x 192 mm	
		Standard accessories	Rubber Sheet, Screw, DC cable 1set	

The commands to support and the detail of command actions will have some differences, due to the differences in functionalities from the current cameras.

anasonic

System Solutions Company Broadmedia Systems Business Unit 4-3-1 Tsunashima-Higashi, Kohoku-ku, Yokohama City 223-8639, Japan http://panasonic.net/pss/broad/

[Countries	and	Regions1
Localities	uiiu	ricgionaj

+54 1 308 1610 +61 2 9986 7400 +49 (0)611 235 401 Argentina Australia Austria Bahrain Belgium +973 252292 +32 (0)2 481 04 57 +359 2 946 0786 +55 11 3889 4035 +1 905 624 5010 Bulgaria Brazil Canada +86 10 6515 8828 +852 2313 0888) China (Hong Kong +420 236 032 552/511 Czech Republic +45 43 20 08 57 +20 2 3938151 Denmark Egypt +20 2 3936151 Finland, Latvia, Lithuania, Estonia +358 (9)521 52 53 France +33 (0)1 49 46 43 59 Germany Greece +49 (0)611 235 401 +30 210 96 92 300 Hungary +36 (1)382 60 60 +62 21 385 9449 +98 21 2271463

Italy Jordan +39 02 67 88 449 +961 6 586 1914 Kazakhstar +7 3272 980 891 Korea +82 2 2106 6666 +965 481 2123 Kuwait Lebanon +961 1 216827 +60 3 5549 5422 +52 5 488 1000 Malaysia Mexico Montenegro,

+41 (0)26 466 25 20 Netherlands +31 73 64 02 577 New Zealand Norway +64 9 272 0100 +47 67 91 78 00 Pakistan +92 5370320 21 +507 229 2955 +51 145 29470 Panama Peru Philippines Poland +63 2 633 6162 +48 (22)338 1100 Portugal +351 21 425 77 04

Puerto Rico

Romania

+1 787 750 4300 +40 21 211 4855

Russia & CIS Saudi Arabia Singapore

Vietnam

+7 495 980 42 06 +966 1 465 0709 +65 6270 0110 Slovak Republic +421 (0)2 52 92 14 23 Slovenia, Croatia, Bosnia, Macedonia

+44 (0)20 76 63 36 57 +27 11 313 1400 +34 (93) 425 93 00 South Africa Spain +46 (8) 680 26 41 +41 (0)41 259 96 32 +886 2 2227 6100 Sweden Switzerland Taiwan +66 2 731 8888 +90 216 578 3700 Thailand Turkey

+971 4 282201 +380 44 4903437 +380 44 4903438 U.A.É. Ukraine [ext. 112] +44 (0) 1344 70 69 20 U.S.A. +1 201 348 5300 +1 800 528 8601

+84 88370280

^{**} Compatible models: AW-PH650/AW-PH400/AW-PH405/AW-PH360.We recommend the AW-LZ17MD9A lens when using with the AW-PH360

Compatible models: AW-RP655/AW-RP555 as well as AW-RP400 and AW-CB400. Models manufactured before January 2009 require upgrading For details, please contact a sales outlet.